
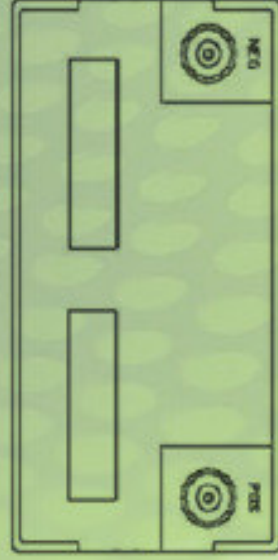


350 (mm)

167 (mm)

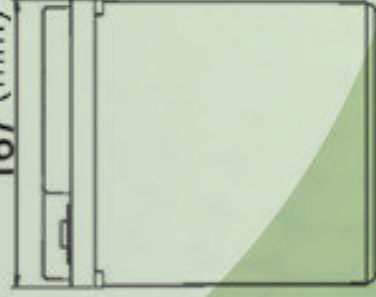

Threaded inserted M6

M6 (0.24")



$\phi 16$

Nominal Voltage	12 Volt
Nominal Capacity	90 Ah 20 hours rate to 4.5 Vpc at 25 °C
Float charging voltage	13.50 - 13.80 V/bloc at 25 °C
Boost charge voltage	14.40 - 15.00 V/bloc at 25 °C
Float voltage compensation	-18mV/°C
Maximum charging current	20 A
Case	ABS with HB flammability rate (according UL 94)
Internal resistance	4.5 m $\Omega$ in full charged condition
Weight	26 kg
Dimensions L x W x H (TH)	350 x 167 x 179
Operative temperature range	-20 °C to 50 °C